

Model Name	TT-6518RS	TT-7518RS	TT-8618RS	TT-9818RS
Active Screen Size	65"	75"	86"	98"
DISPLAY				
Backlight	LED			
Display Area	1429 x 804 mm	1650 x 928 mm	1895 x 1066 mm	2162 x 1217 mm
Display Ratio	16 : 9			
Resolution	3840 x 2160 Pixels			
Display Colors	8 bit		10 bit	
Brightness	370 cd/m2			500 cd/m2
Contrast Ratio	4000 : 1			
Life Time	> 30,000 hours			
ELECTRICAL				
Power Consumption	Maximum <220W Standby Mode ≤0.5W	Maximum <350W Standby Mode ≤0.5W	Maximum <450W Standby Mode ≤0.5W	Maximum <700W Standby Mode ≤0.5W
Working Voltage	AC 100-240V, 50/60Hz			
TOUCH				
Touch Surface	Next Generation Anti-Glare Glass			
Transparency	> 88%			
Haze	2% ~ 5%			
Touch Surface Hardness	> H7			
Touch Sensor	Infrared Touch			
Touch Points	20 Points Under Windows / 10 Points Under Android			
Response Time (Typical)	8ms			
Touch Screen Writing Tools	Nano Pen / Finger / Palm			
Positioning Accuracy	± 2mm		± 3mm	
Communication Interface	USB-A			
SPEAKER				
Speaker Position	Forward			
Rated Impedance	8Ω			
Freq. Response	200Hz - 20kHz		90Hz (±20%) - 18kHz	
Max. Power Output	15W x 2			
Transmission Range	5M			
TRANSPORTATION / STORAGE				
Storage Temperature/Humidity	-20°C - 60°C / 20% - 90%			
Working Temperature/Humidity	0°C - 40°C / 20% - 80%			
Installation (Optional)	Wall-Mounted / Floor Stand			
Outline Dimension	1544 x 939 x 99 mm	1768 x 1066 x 104 mm	2019 x 1209 x 116 mm	2256 x 1361 x 106 mm
Net Weight	45 kg	59 kg	74 kg	130 kg
VESA Mount Installation Position	600 x 400 mm			
Intelligent Thermal Protector	Automatic Hibernate when overheated			
Wireless Screen Sharing	Available			
PORTS				
Front Interface Inputs	HDMI 1.4 (4K@30Hz) x 1, USB (Touch) x 1, USB (Dynamic) x 2, MIC x 1			
Rear	AV Inputs	HDMI 2.0 (4K@60Hz) x 2, DP1.2 (4K@60Hz) x 1, VGA (1920x1080@60Hz) x 1, USB (Touch) x 4		
	AV Outputs	HDMI out x 1		
	Others	USB2.0 (Dynamic) x 1, USB3.0 (Dynamic) x 1, USB 2.0 Embedded x 1, RS232 x 1, RJ45 x 2, OPS Slots (4K@60Hz) x 1, DC 5V-2A Out, Line Out x 1, SPDIF Out x 1		

* All specifications are subject to change without further notice.

TRU TOUCH *RS Series*



Redefine Smarter Collaboration

Let the versatile 4K UHD interactive display bring more collaboration and student engagement to your classroom. Turn the display into digital whiteboard, share files in one touch, and use your favorite software all with your fingers and the press of a button. TRU TOUCH RS works in your world and lets you interact your way.

Dual user experience
for education and corporate users.

Up to **20** points
of touch so multiple people can write and share ideas.

Customizable UI
lets you be more productive, faster.



GALAXY INTERNATIONAL SDN. BHD. (445571-W)
(formerly known as Galaxy Overseas Sdn Bhd)

宇宙国际私人有限公司

Global Business & Convention Centre, Block A, Level 3,
No. 8, Jalan 19/1, Section 19, 46300 Petaling Jaya, Selangor, Malaysia.
Tel: 603-7954 4303 Fax: 603-7957 7942 E-mail: ggoc@galaxygroup.com.my URL: www.galaxygroup.com.my

INTERACTION MADE EASY.


- Stunning 4K UHD resolution redefines clarity
- Slim frame, light weight for easy installation
- Windows system and built-in OS support
- Embedded tools and apps
- Reduce clutter and bring efficiency for the faculty
- Comes in 65", 75", 86", and 98"



Intuitive collaboration for classroom



Bring your own device and share files

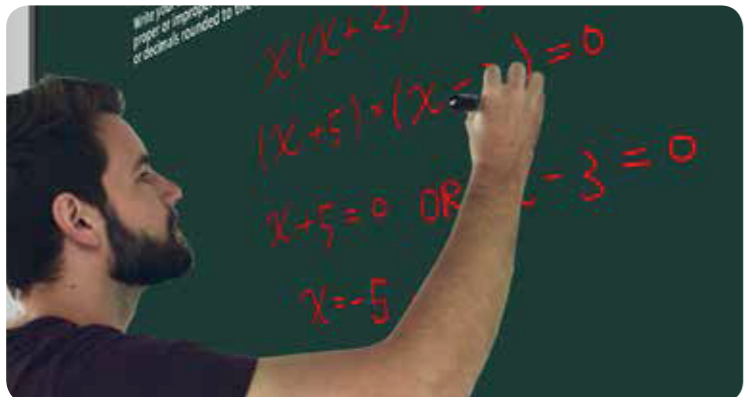

Smooth and fast writing experience

Intelligent Touch



The whiteboard supports object recognition that can differentiate your finger, stylus and palm, and react as marker, thin pen, or eraser.

Responsive 20 Points

The RS series supports up to 20 points of touch, allowing multiple users to interact at the same time with lag-free experience.

65" 75" 86" 98"



Dual Theme Selection

Let you easily change the screen theme and personalize the wallpaper and user interface on your built-in operating system.

TRUCAST EXPRESS

Personalized User Interface

You can add up to 5 of your most frequently-used apps, input sources, external devices or file folders as shortcuts here.

TRUCAST Express App

The built-in wireless casting app lets you connect your own device without hassle. TRUCAST Express supports Airplay, Google Cast, and MirrorOp. Up to 4 devices can be display on the screen at once.

Diverse Connectivity

Connect with a variety of I/O ports, including 3 HDMI ports, a DisplayPort, and a VGA port.